



INDUSTRIAL SCALES

LIVE ANIMAL SCALES



- EC type approval
- Various capacity options from 600 kg up to 3000 kg
- Integrated cage with entrance and exit gates
- Opportunity to communicate with computer
- Printing Ticket and – Label through printer connection
- Reporting and recording possibilities



Live animal scales are especially designed for weighing of animals in feeding farms, animal markets, and integrated meat plants. They are used in trade of cattle and sheep's, vet services and weight inspection of animal herds. It provides rapid and healthy weighing process, owing to its diamond-shaped platform, entrance-exit gates and special case design.


Beside to their basic features like tare, automatic, semi-atomic zero, easily readable VFD display and RS 232 serial communication output, they also have many additional weighing functions which enable ticket and label print outs through thermal, ribbon, dot matrix and barcode type printer connections.

Live animal scales can produce in various capacity and dimensions from galvanized steel and stainless steel material. Accessories like entrance-exit ramps, display colon; display protection panel can be added. In addition to single weighing of animals, it is possible to design custom projects for weighing of animal herds on demand.

By connecting with Computers and special software, it is possible to follow growing of animal and analyze its cost. Animals can be weighed daily and records can be kept by their ear numbers. Farmers can prepare graphics of weight gain of animals individually and totally. It is possible to make cost analyzes by using this information



LIVE ANIMAL SCALES

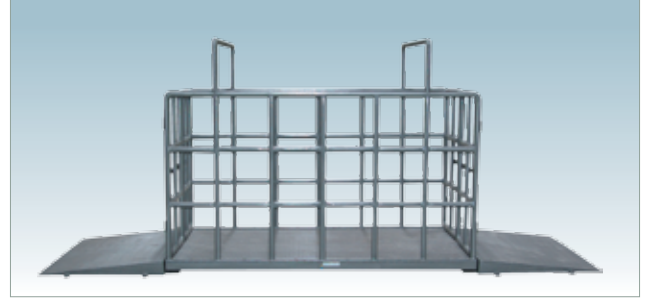

TECHNICAL SPECIFICATIONS

PLATFORM

Model	WP-A
Material	Steel
Environmental Protection	IP 65 (Standart)-IP 67 / IP 68 (Option)
Load cell	4 pcs, OIML R60 C3 Class
Load cell Protection Class	Steel IP 67 (Standart) / Stainless Steel IP 68 (Option)
Platform Material Options:	SG: Galvanized Steel TSS: Stainless Steel Scale Cover

WEIGHT INDICATOR

Model	LL3
Class	III / IIII
Caseing	Aluminium Cast (Standard) Stainless Steel (Option)
Protection Class	IP 54 / IP 65
Display	7 Dijit, 14 mm. VFD Display Zero, Net, Kg, Weight Range, Stand Still Load Symbols
Keypad	Membran type, 20 functional alphanumeric keys (Programming, Calibration, Zero, Tare, Printing, Reporting)
Operation Voltage	220 VAC / 12 VDC
Operation Temp. Range	- 10°C ... + 40°C
Serial Communication	RS232
Options	<ul style="list-style-type: none"> • 1 x RS232, 1 x RS 422/485 • RF Communication • 2MB. (105.000 Record) Alibi Memory • Operating with Battery

CAPACITIES AND DIMENSIONS

MODEL CODE	CAPACITY X DIVISION	DIMENSION
WP-A-125X250-600K.4L	600 kg X 200 g	125 X 250 cm
WP-A-125X250-1500K.4L	1500 kg X 500 g	125 X 250 cm
WP-A-125X250-3000K.4L	3000 kg X 1 kg	125 X 250 cm

OPTIONS



LL2-WT-L Weighing Terminal




Printer



Indicator Connector Column



Remote Display



Ramp



RF Communication Kit

Tunaylar keeps its right secret to change all technical specifications, image, colour and accessories of the products without prior notice.