




INDUSTRIAL SCALES

MONORAIL SCALES



- EC type approval
- Various Capacity options from 300 kg up to 1500 kg
- Practical weighing on monorail
- Easy mounting in short time
- Opportunity to communicate with computer
- Printing Ticket and – Label through printer connection
- Reporting and recording possibilities

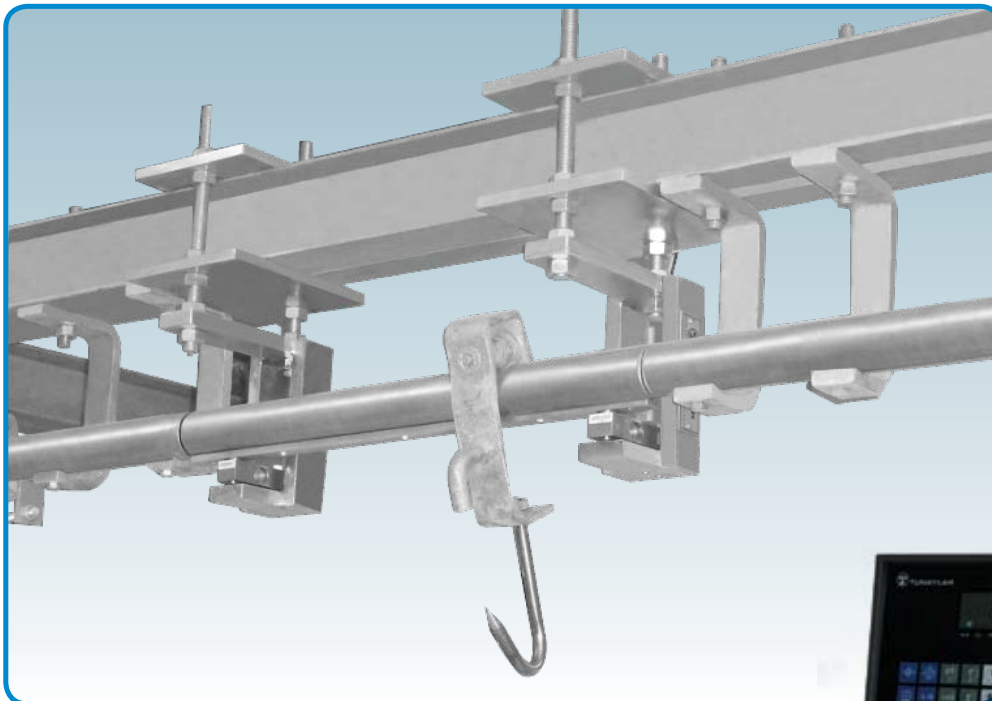


Monorail scales are specially designed for weighing sheep and cattle carcass on monorail lifting system for integrated meat plants, slaughterhouses, cold storage areas and retail fresh meat shops. It saves time and labor thanks to its low cost and short time installation on rail.

Beside to their basic features like tare, automatic, semi-atomic zero, easily readable VFD display and RS 232 serial communication output, they also have many additional weighing function which enables ticket and label print outs through thermal, ribbon, dot matrix and barcode type printer connections. By connection with Computer or Industrial PC based terminal, monorail scales allow flexible applications with special software options.

Monorail scales can be designed suitable to company's monorail systems which are already installed before. Monorail scales are manufactured in different sizes and capacities from galvanized steel or stainless steel. Beside to accessories like remote display and display protection panel, Monorail scales allow flexible applications with special software options.



MONORAIL SCALES

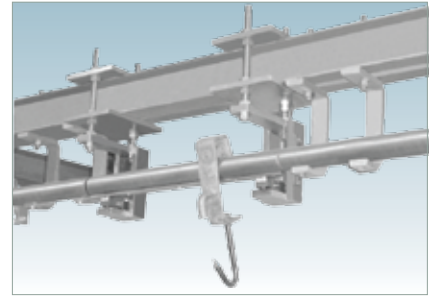

TECHNICAL SPECIFICATIONS

PLATFORM

Model	WP-O
Material	Steel
Environmental Protection	IP 65 (Standart)-IP 67 / IP 68 (Option)
Load cell	2 pcs, OIML R60 C3 Class
Load cell Protection Class	Stainless Steel IP68
Platform Material Options:	SG: Galvanized Steel , CSS: Complete Stainless Steel

WEIGHT INDICATOR

Model	LL3
Class	III / IIII
Caseing	Aluminium Cast (Standard) Stainless Steel (Option)
Protection Class	IP 54 / IP 65
Display	7 Dijit, 14 mm. VFD Display Zero, Net, Kg, Weight Range, Stand Still Load Symbols
Keypad	Membran type, 20 functional alfanumeric keys (Programming, Calibration, Zero, Tare, Printing, Reporting)
Operation Voltage	220 VAC / 12 VDC
Operation Temp. Range	- 10°C ... + 40°C
Serial Communication	RS232
Options	<ul style="list-style-type: none"> • 1 x RS232, 1 x RS 422/485 • RF Communication • 2MB. (105.000 Record) Alibi Memory • Operating with Battery

CAPACITIES AND DIMENSIONS

MODEL CODE	CAPACITY X DIVISION	DIMENSION
WP-O-300K	300 kg X 100 g	70 - 100 cm
WP-O-600K	600 kg X 200 g	70 - 100 cm
WP-O-1500K	1500 kg X 500 g	70 - 100 cm

OPTIONS



LL2-WT-L Weighing Terminal



Printer



Indicator Connector Column



Remote Display



RF Communication Kit